


DWG NO.: TRMG-6060 REV. 01 (UNIT: MILIMETER)

Part Number		MG601	MG605	MG602
Output Speed	RPM	2,5	5	10
Output Torque	Kgf.cm	≥45	≥40	≥20
Capacitor Value	μF	0,27	0,33	
Max. Allowable Torque	Kgf.cm	≤60		
Rated Voltage	VAC	220		
Rated Frequency	Hz	50		
Input Power	W	≤12		
Input Current	mA	≤50		
Thermal Insulation	Class	E		
Temperature Rise	K	≤75		
Starting Voltage	VAC	≤180		
Insulation Resistance	MΩ	≥100		
Dielectric Strength	VAC	1800V for 1S		
Capacitor Voltage	VAC	630		
No Load Noise Level	dB(A)	≤45		

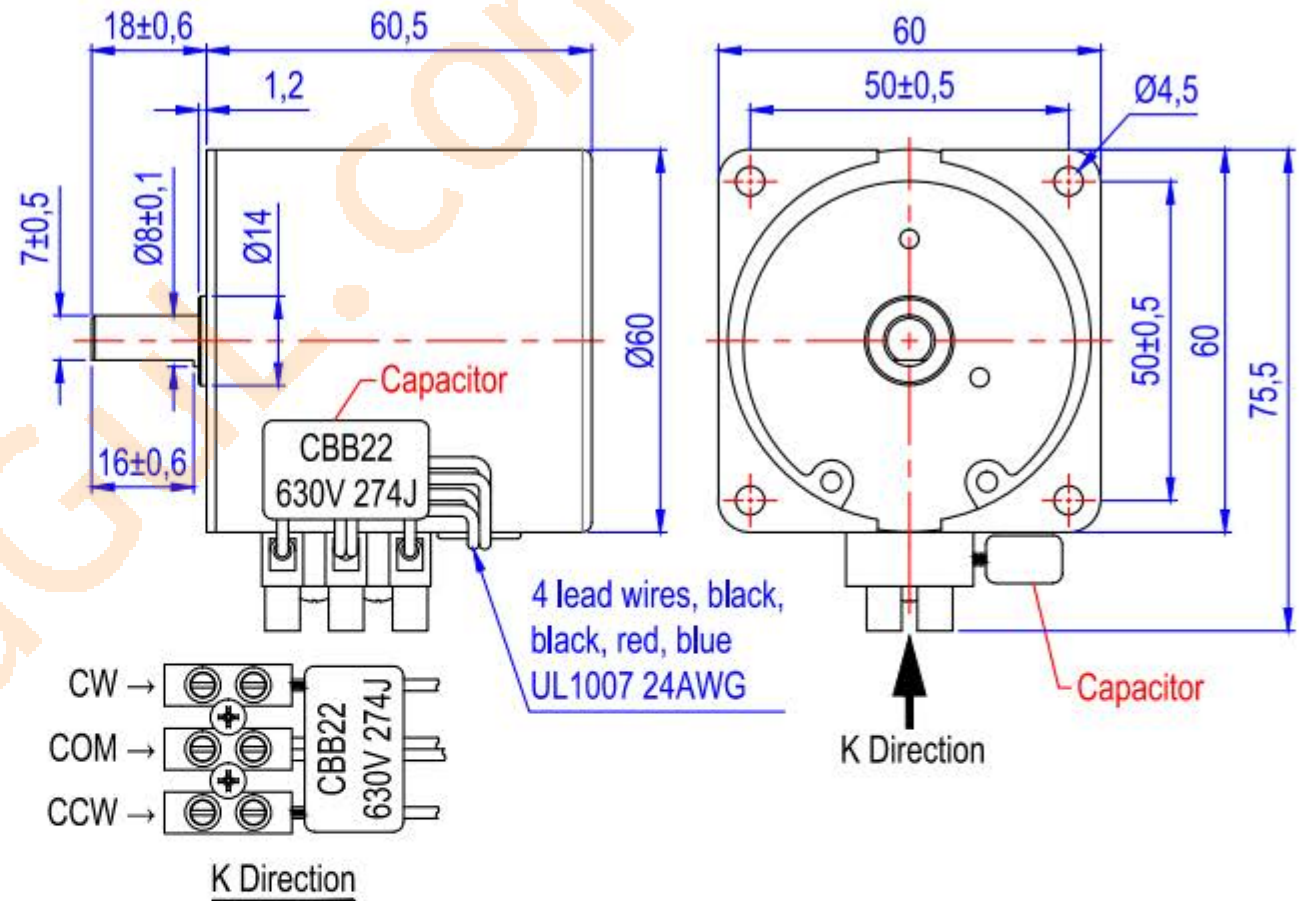

50  
30

MG601-220VAC  
2,5RPM - ≤12W  
CE 20221128

MG605-220VAC  
5RPM - ≤12W  
CE 20221128

MG602-220VAC  
10RPM - ≤12W  
CE 20221128

The materials described and/or the information conveyed by this drawing and/or the relative documents are proprietary to Motor are or may be the subject of patent applications, and may not be copied and divulged to others, or used for manufacturing without written consent by Motor

MRK	DESCRIPTION	SIGNED	DATE	TOLERANCE	VIEW ANGLE	Name	Reversible Synchronous Motor
DSGN		APRV		0-6 ±0.1 6-30 ±0.15 30-120 ±0.25		Model	
CHCK		DATE	2022		SCALE 1:1	For	
						M/S	Mugul Elektronik - Türkiye
						F. No.	TRMG-6060